

703ZL™


**A REVOLUTIONARY PREMIUM PERFORMANCE DRIVE TIRE
THAT CAN ACTUALLY DRIVE YOUR BOTTOM LINE.**



yokohama.ca

 **YOKOHAMA**

Our groundbreaking 703ZL is the first tire born of a revolutionary concept we call Zenvironment.™ By utilizing the latest advances in tire technology, we developed a compound, tread design and casing construction that offer longer treadwear and the lowest rolling resistance in the category.

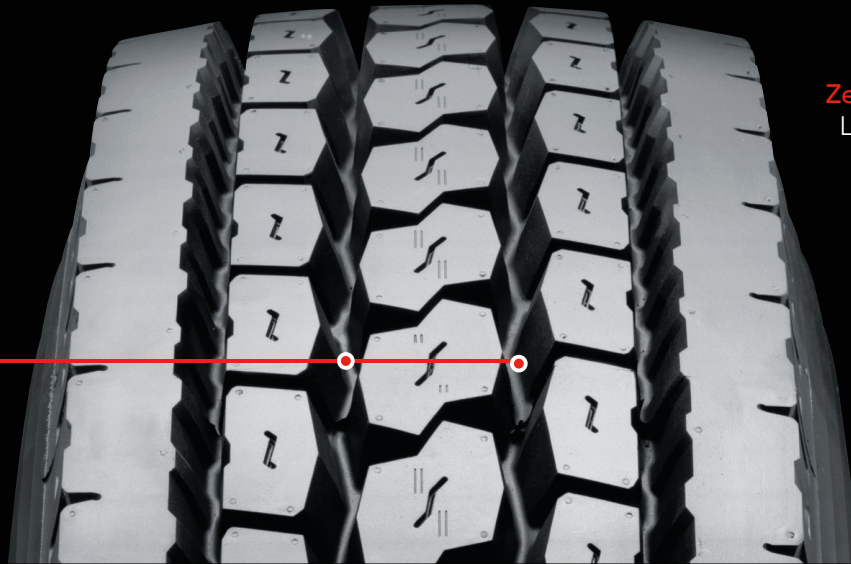

Deepest Tread Depth
in the Industry

Zenvironment Technology
Less heat buildup, lowest
rolling resistance



LONGEVITY

The deepest original tread depth of any line haul drive tire (32/32") delivers exceptionally long treadwear.

The 703ZL's revolutionary casing, backed by a 7-year warranty, combines with our latest compound technology to distribute contact pressure more evenly across the surface.

EFFICIENCY

This special compound utilizes Zenvironment technology to produce stronger and more pliable rubber. It significantly reduces heat build up, improves treadwear and provides the lowest rolling resistance in its category.

DEPENDABILITY

Casing innovations derived from Zenvironment technology allow us to accurately predict changes in tire shape that occur in early stages of wear. The result is increased durability due to stabilized performance over the life of the tire.

The funnel-shaped grooves are wider at the top for enhanced traction, yet narrower at the base to prevent stones from traveling to the bottom. They provide superior comfort and increase block rigidity for greater resistance against uneven wear.

SIZES AND SPECIFICATIONS

Tire Size	Item No.	Std. Weight (Lbs)	Rim Width		Inflated Dimensions		Loaded Dimensions			Max. Load @ Max. PSI		Tread Depth
			Pref.	Alt.	Overall Width	Overall Diameter	Static Radius	Rev/ Mile	Section Width	Single	Dual	
11R22.5 14G TL	77102	134	8.25	7.5	11.0	42.3	19.7	494	12.1	6175 @ 105	5840 @ 105	32
295/75R22.5 14G TL	77101	129	9.00	8.25	11.5	40.9	19.1	510	12.5	6175 @ 110	5675 @ 110	32
11R24.5 14G TL	77104	143	8.25	7.5	11.0	44.3	20.7	471	12.2	6610 @ 105	6005 @ 105	32
285/75R24.5 14G TL	77103	135	8.25	8.25	11.1	42.2	19.8	493	12.0	6175 @ 110	5675 @ 110	32