


Y523

A HIGH IMPACT TIRE FOR DOZER/LOADER AND DUMP TRUCK



Y523

Dump trucks ride easy with the cut resistance rubber compounds and the high tensile steel breaker that provides impact and cut resistance at the tread crown area. Less heat generation gives extra long life to this highly durable tire.

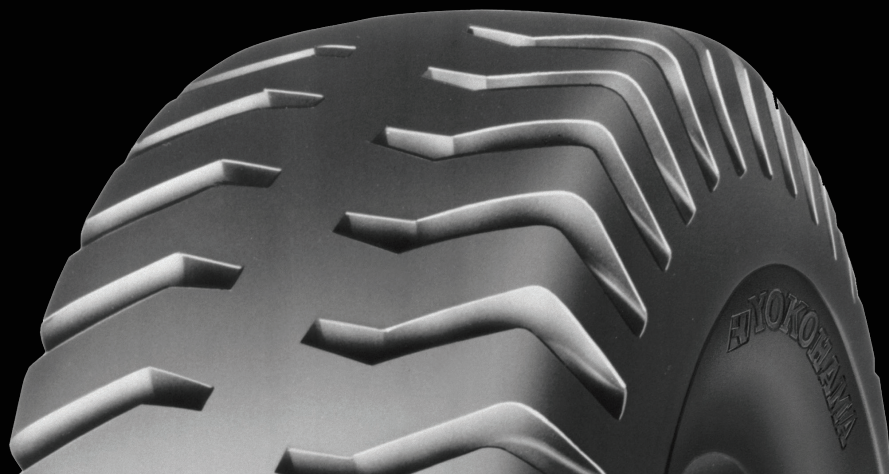

LONGEVITY

Extra deep tread

EFFICIENCY

Better tread cut and impact resistance

DEPENDABILITY

High tensile steel breaker

SIZES AND SPECIFICATIONS

Tire Size	Item No.	Std. Weight (Lbs)	Rim Width		Inflated Dimensions		Loaded Dimensions			Tread Depth
			Pref	Alt	Overall Width	Overall Diameter	Static Radius	Rev/Mile	Section Width	
1800-25 36 ID E-4 TL	02318	886	0.00	0.00	20.4	65.0	30.4	0	21.3	77
1800-25 40 ID E-4 TL	02323	882								77
1800-25 40 Y523	02346	799	0.00	0.00	20.4	65.0	30.4	0	21.3	77
1800-25 32 E-4 TL	52304	769	0.00	0.00	20.4	65.0	30.4	0	21.3	77
1800-33 36 ID E-4 TL CP	02312	898	0.00	0.00	20.4	72.8	34.2	0	21.3	71
1800-33 36 ID E-4 TL RE	02325	898	0.00	0.00	20.4	72.8	34.2	0	21.3	71
2100-35 36 E-4 TL	52316	1,229	0.00	0.00	23.2	80.5	37.2	0	24.5	80
2400-35 42 E-4 TL	02309	1,598	0.00	0.00	26.2	84.5	39.0	0	28.0	81
2400-35 42 ID E-4 TL LOG-ST	02316	1,751	0.00	0.00	26.2	84.5	39.0	0	0.0	81
2700-49 42 E-4 TL CP	02310	2,626								90
2700-49 42 ID E-4 TL LOG-ST	02317	2,646	0.00	0.00	29.4	105.5	49.0	0	0.0	90
3000-51 46 E-4 TL CP	52384	3,729	0.00	0.00	113.2	33.4	52.7	0	35.3	106
3300-51 58 E-4 TL	02341	4,425	0.00	0.00	36.5	119.6	55.3	0	0.0	104
33.00-51 58 ID TL	02355	4,741								104
3600-51 58 E-4 TL RE	52378	5,705	0.00	0.00	125.9	40.9	58.1	0	42.9	116
4000-57 E76 Y523E E-4 TL	02308	7,751								122
4000-57 76 E-4 TL	02313	8,102								122
4000-57 76 E-4 TL HR	02314	8,102	0.00	0.00	139.8	44.4	63.9	0	47.2	122
4000-57 E76 Y523EN L RRZA	02345	7,751								122
4000-57 76 E-4 TL HR-V	88916	7,601								122